

THIN FILM POROSITY TESTING

Complies with the requirements of

AS3894.1-2002 (Wet Sponge Testing); ASTM G62-07; ASTM G6-07; ASTM D5162-08; NACE RP0274-2004; NACE SP0188-2006

Features

- LED display of voltage
- Internally mounted 9v battery
- Low battery condition LED indicator
- Audible and visual fault alarms
- Telescopic handle for user comfort (extends to 1.2m)
- Large probe head (230 x 40mm) and wider sponge gives faster tests
- Earphone jack to allow testing in noisy environments (earphone not supplied)

Application


- Uses the wet sponge method to detect pinholes in coatings

Models

- Selectable 9; 67.5 or 90v test voltage

We highly recommend that coatings over 150µm, or coatings in corrosive environments, be high voltage porosity tested.

Made in AUSTRALIA

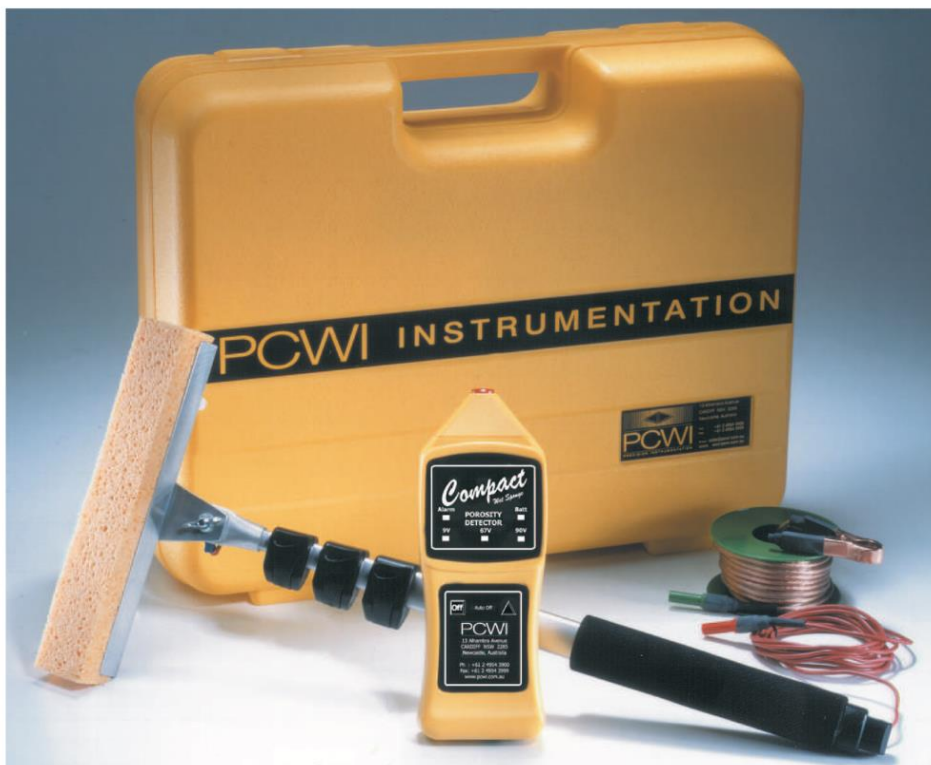

Specifications

Range:	0 to 500µm
Operating temperature:	0 to +50°C
Test Voltage:	9, 67.5 and 90V
Telescopic Probe length:	350mm to 1.2m
Power supply:	9v Battery

Dimensions: 210 x 75 x 35mm

Weight: 350g

Kit comprises

- Unit and Handle including Sponge
- Belt/pocket clip
- Seven metre earth lead and clip
- Carry case
- Instruction manual with Calibration certificate

DISTRIBUÉ PAR / DISTRIBUTED BY:

QNDE
QUALITY NDE LTD

QUEBEC

164, St-Jean-Baptiste
Mercier, QC J6R 2C2
450-691-9090
info@qn.de.ca

ONTARIO

275, Sheldon Drive, Unit 3
Cambridge, ON N1T 1A3
519-894-9069
nadams@qn.de.ca

ALBERTA

7307, 101 street NW
Edmonton, AB T6B 2J9
587-689-6811
lfields@qn.de.ca

www.qn.de.ca

1-800-361-3630